


Speakers should be plugged into a line from the kitchen using black extension cords and power strip to avoid buzz from ungrounded electrical line on the gallery's West wall outlets.

To avoid feedback if necessary, speakers can be tilted slightly outwards from straight on

Heavy 1/4 inch Stereo Cables from Line Out

Cable - RCA > 2x XLR into Lines 1 and 2 on USB Interface

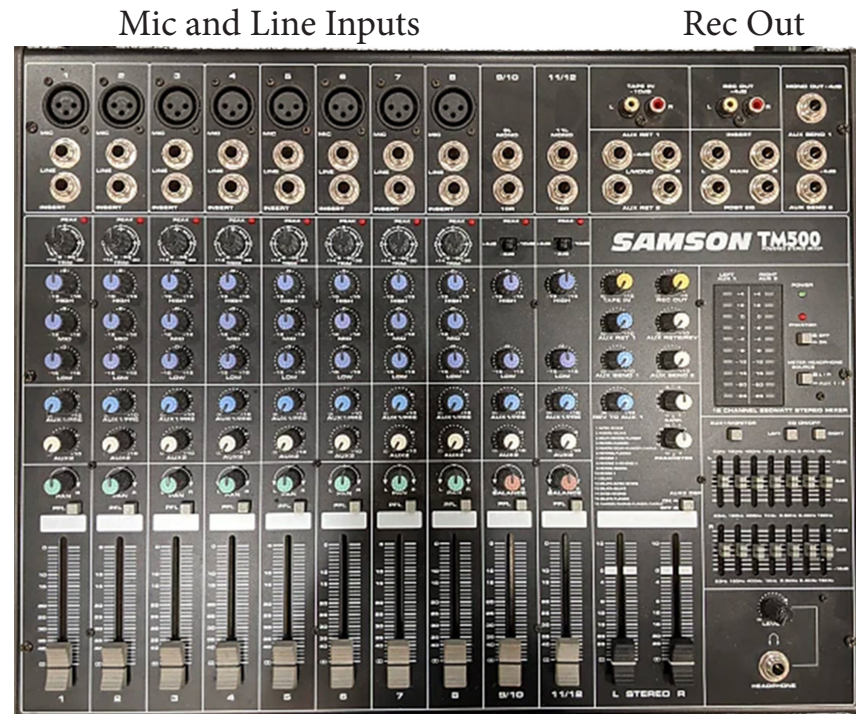

Adjust pan on lines 1, 2 for a faux stereo effect

Speaker equalization has no effect on Rec Out. EQ individual tracks instead

YWC Sound System Diagram - Basic Sketch (March 2023)